

**FAMAT**<sup>+</sup>  
sampling systems

## **FAMAT SAMPLING SYSTEMS**

*SAMPLING FOR POWDER, SOLIDS, PASTE & SLURRIES*


**Get rid of o-rings tightness with our proven  
Expanding Piston Technology EPT®**



Dead zone free

Long service life

Certified bubble tight

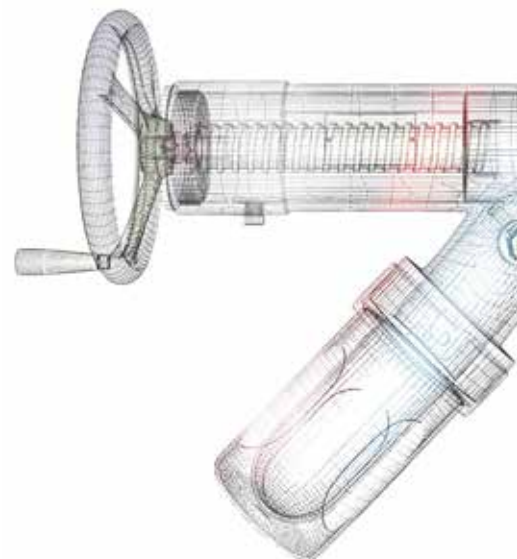

# SAMPLING SYSTEMS DN50 / 2"



## 125A | STANDARD



## 125TC | TRI CLAMP EASYCLEAN

Piston can be removed easily  
from valve housing for full cleaning



## 125CC | CRUST BREAKING

Piston can break crust formed  
in the dryer or vessel before sampling



## 125TC/OEL | HIGH CONTAINMENT

OEL device allows the removal of a product  
sampled under contained conditions



## 125S | SECURITY

Mechanical security device :      Piston shall be closed to remove the bottle  
Bottle shall be coupled to open the piston



## 125HS | HORIZONTAL

Applicable in vertical pipe  
Intrusive sampler without dead space



## 125AUT | AUTOMATIC

Double acting pneumatic actuator  
allows a remote control

# SAMPLING SYSTEMS DN25 / 1"



## 130C | STANDARD



## 130TC | TRI CLAMP EASYCLEAN

Piston can be removed easily  
from valve housing for full cleaning



## 130CC | CRUST BREAKING

Piston can break crust formed  
in the dryer or vessel before sampling



## 130TC/OEL | HIGH CONTAINMENT

OEL device allows the removal of a product  
sampled under contained conditions



## 130HS | HORIZONTAL

Applicable in vertical pipe  
Intrusive sampler without dead space



## 130AUT | AUTOMATIC

Double acting pneumatic actuator  
allows a remote control

SWISS MADE SINCE 1974



# At a glance

We allow our customers to keep production running and ensure product quality by 100% reliable and representative sampling with quality and reliability equipment that meets expectations.

A comprehensive package of customer services completes our proposition.



FAMAT sampling S.A  
Rte du Grand-St-Bernard 14  
1933 Sembrancher  
SWITZERLAND

T +41 27 552 11 11 | Phone  
F +41 27 552 11 10 | Fax  
info@famat-sampling.com  
[www.famat-sampling.com](http://www.famat-sampling.com)

